



WEATHERPROOF DIGITAL ACCESS CONTROL KEYPADS For Residential and Commercial Applications

DK-9932 • DK-9931 • DK-9930

New Programming Software, New Construction, Fine Workmanship

DK-9932 2 Relay Outputs Full Feature System

DK-9931 1 Relay & 1 Transistor Output Full Feature System

DK-9930 1 Relay Output Compact System

CE
RoHS COMPLIANT



DK-9932 / DK-9931



DK-9930

FEATURES AND FUNCTIONS:

- OPERATE FAIL-SAFE OR FAIL-SECURE ELECTRIC LOCKS
- AUTO CODE ENTRY OR MANUAL CODE ENTRY
- DOOR FORCED OPEN WARNING
- DOOR LEFT OPEN TOO LONG WARNING
- OUTPUT ACTIVATION ANNOUNCER
- PACIFIER TONE ON-OFF OPTION, AUDIBLE OR SILENT OPERATION
- KEYPAD LOCKS OR ALARMS AFTER 3-10 FALSE CODE ENTRIES
- SINGLE USER MODE OR MULTI-USER MODE
- KEY ACTIVATION, ALARM, TAMPER OUTPUTS
- TAMPER BEEP FUNCTION WITH ON-OFF OPTION
- EGRESS INPUT FOR DOOR-OPEN REMOTE TRIGGERINGS
- DOORBELL BUTTON
- DOORBELL BUTTON TRIGGERS DOORBELL THROUGH RELAY CONTACT (1 A max)
- FEATURES ARE KEYPAD PROGRAMMABLE
- NON-VOLATILE MEMORY IN POWER FAILURE
- WEATHERPROOF KEYPAD HOUSING

MANUFACTURER & EXPORTER



ADVANCED ELECTRONICS INDUSTRY LIMITED
HONG KONG


TEL : (852) 24299719
FAX : (852) 24892411
E-MAIL : aei@aei-secucom.com
WEBSITE : <http://www.aei-secucom.com>

WEATHERPROOF DIGITAL ACCESS CONTROL KEYPAS

DK-9932 - - 2 OUTPUTS: DUAL RELAY OUTPUT

DK-9931 - - 2 OUTPUTS: 1 RELAY OUTPUT, 1 TRANSISTOR OPEN COLLECTOR OUTPUT

DK-9932

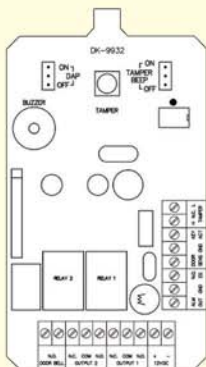

FEATURES AND FUNCTIONS:

- 500 Users
- Operates Fail-safe or Fail-secure Electric Locks
- Auto Code Entry or Manual Code Entry
- Door Forced Open Warning
- Door Left Open Too Long Warning
- Output Activation Announcer
- Pacifier Tone Inhibit Control, Audible or Silent Operation
- Keypad Locks or Alarms After 3-10 False Entries
- Tamper Beep Available or Tamper Beep Disabled
- Key Activation, Alarm and Tamper Outputs
- Egress Input for Door-open Remote Triggering
- Doorbell Button
- Doorbell Button Triggers Doorbell Through Relay Contact (1 Amp max)
- Features are Keypad Programmable
- Non-volatile Memory in Power Failure

SPECIFICATIONS:

Operating Voltage: 12VDC

Current Drain: Quiescent State=23mA (DK-9932) 22mA (DK-9931)
Active State=100mA (DK-9932) 84mA (DK-9931)


Relay Output Contacts: N.O. and N.C. Dry Contacts,
Max Rating of Contact Current 3A/24V DC

Capacity of Recording: Output 1: 500 Codes
Output 2: 500 Codes

Dimension: 129(H) mm x 84(W) mm x 41(D) mm


Weight: 195g (DK-9932) 190g (DK-9931)

DK-9931

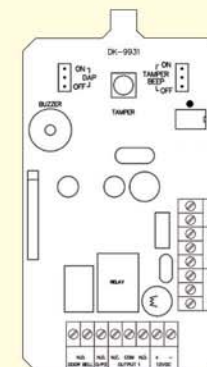

DK-9930 - - 1 OUTPUT: SINGLE RELAY OUTPUT

DK-9930

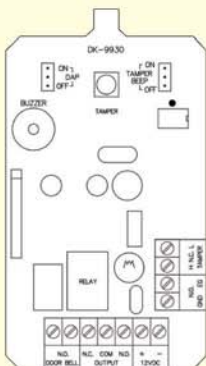

FEATURES AND FUNCTIONS:

- Simple Programming, Easy Operation
- 250 Users
- Multi User Code or Single User Code Operation
- Operates Fail-safe or Fail-secure Electric Locks
- Auto Code Entry or Manual Code Entry
- Keypad Locks for 30 Seconds After 10 False Entries
- Tamper Beep Available or Tamper Beep Disabled
- Tamper Switch can be Connected to Security Alarm System
- Egress Input for Door-open Remote Triggering
- Doorbell Button
- Doorbell Button Triggers Doorbell Through Relay Contact (1 Amp max)
- Features are Keypad Programmable
- Non-volatile Memory in Power Failure

SPECIFICATIONS:

Operating Voltage: 12VDC

Current Drain: Quiescent State=23mA
Active State=76mA

Relay Output Contacts: N.O. and N.C. Dry Contacts,
Max Rating of Contact Current 3A/24V DC

Capacity of Recording: 250 ID Cards, 250 Codes or 1 Common Code

Dimension: 129(H) mm x 84(W) mm x 41(D) mm

Weight: 195g

SUMMARY CHART

FEATURE PRODUCT	OPERATING VOLTAGE	RELAY & TRANSISTOR OUTPUTS	DOOR FORCED OPEN WARNING	DOOR LEFT OPEN TOO LONG WARNING	AUTO OR MANUAL CODE ENTRY	RELAY ACTIVATION ANNOUNCER	PACIFIER TONE (ON-OFF OPTIONS)	KEY ACTIVATION OUTPUT	DOOR AUTO RELOCK	ALARM OUTPUT	EGRESS BUTTON INPUT	TAMPER SWITCH	TAMPER BEEP FUNCTION (ON-OFF OPTION)	SINGLE/ MULTI-USER OPTIONS
DK-9932	12VDC	2 RELAY OUTPUTS	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES
DK-9931	12VDC	1 RELAY OUTPUT & 1 TRANSISTOR OUTPUT	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES
DK-9930	12VDC	1 RELAY OUTPUT	NO	NO	YES	NO	NO	NO	NO	NO	YES	YES	YES	YES