

iSecure®

iDK-SERIES

RFID/DIGITAL ACCESS CONTROL KEYPAD

New Programming Software • New Construction • Fine Workmanship



2-IN-1


Proximity Card Reader
Digital Code Keypad



RoHS COMPLIANT

Advanced Features • Multi Functions • 3-Operation Mode

Hard Keytop Keypad

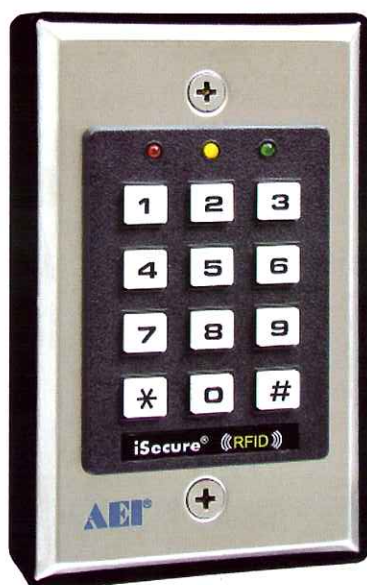

iDK-9730
iDK-9731
iDK-9732

Back-lit Keypad



iDK-9760
iDK-9761
iDK-9762

Back-lit Keypad



iDK-9780
iDK-9781
iDK-9782

With Doorbell Button

iDK-9730, iDK-9760, iDK-9780 – 1 Relay Output Compact System

iDK-9731, iDK-9761, iDK-9781 – 1 Relay Output & 1 Transistor Output Full Feature System

iDK-9732, iDK-9762, iDK-9782 – 2 Relay Outputs Full Feature System



High Quality Security Products

iDK-9730 • iDK-9760 • iDK-9780

FEATURES AND FUNCTIONS:

- Simple Programming, Easy Operation
- 3-Operation Mode:
ID Card Operation,
Password Operation,
ID Card + Password Operation
- 1 Relay Output
- 250 Users
- Multi User Code or Single Common User Code Operation
- Operates Fail-safe or Fail-secure Electric Locks
- Auto Code Entry or Manual Code Entry
- Keypad Blocking for 30 Seconds After 10 False Entries
- Tamper Beep Available or Tamper Beep Disabled
- Tamper Warning Output
- Non-volatile Memory in Power Failure
- Stainless Steel Faceplate
- Flush Mount or Surface Mount

SPECIFICATIONS:

Operating Voltage : 12VDC

Current Drain : Quiescent State= 21mA (iDK-9730)
22mA (iDK-9760)
25mA (iDK-9780)
Active State=53mA (iDK-9730)
72mA (iDK-9760)
94mA (iDK-9780)

Relay Output Contacts : N.O. and N.C. Dry Contacts,
Max Rating of Contact Current
2A/24V DC (5A/24V DC Option)

Capacity of Recording : 250 ID Cards,
250 Codes, or 1 Common Code

Card Reading Distance : Max Distance 6 CM

Type of ID Card : EM Card 125 KHz

Dimension : 117(H) x 73(W) x 40(D) mm

Weight : iDK-9730 150g
iDK-9760 155g
iDK-9780 158g

iDK-9731 • iDK-9761 • iDK-9781

FEATURES AND FUNCTIONS:

- Multi Functions
- 3-Operation Mode:
ID Card Operation,
Password Operation
ID Card + User ID Number Operation
- 1 Relay Output & 1 Transistor Output
- 500 Users
- Operates Fail-safe or Fail-secure Electric Locks
- Auto Code Entry or Manual Code Entry
- Door Forced Open Warning
- Door Left Open Too Long Warning
- Output Activation Announcer
- Pacifier Tone Inhibit Control, Audible or Silent Operation
- Keypad Blocking or Alarming After 3-10 False Entries
- Tamper Beep Available or Tamper Beep Disabled
- Alarming and Tamper Warning Outputs
- Non-volatile Memory in Power Failure
- Stainless Steel Faceplate
- Flush Mount or Surface Mount

SPECIFICATIONS:

Operating Voltage : 12VDC

Current Drain : Quiescent State= 25mA (iDK-9731)
25mA (iDK-9761)
25mA (iDK-9781)
Active State= 57mA (iDK-9731)
76mA (iDK-9761)
94mA (iDK-9781)

Relay Output Contacts: N.O. and N.C. Dry Contacts,
Max Rating of Contact Current
2A/24V DC (5A/24V DC Option)

Capacity of Recording : 500 ID Cards or 500 Codes, or
ID Cards and Codes Max total 500 sets

Card Reading Distance : Max Distance 6 CM

Type of ID Card : EM Card 125 KHz

Dimension : 117(H) x73(W) x40(D) mm

Weight : iDK-9731 155g
iDK-9761 160g
iDK-9781 165g

iDK-9732 • iDK-9762 • iDK-9782

FEATURES AND FUNCTIONS:

- Multi Functions
- 3-Operation Mode:
ID Card Operation,
Password Operation
ID Card + User ID Number Operation
- 2 Relay Outputs
- 500 Users
- Operates Fail-safe or Fail-secure Electric Locks
- Auto Code Entry or Manual Code Entry
- Door Forced Open Warning
- Door Left Open Too Long Warning
- Output Activation Announcer
- Pacifier Tone Inhibit Control, Audible or Silent Operation
- Keypad Blocking or Alarming After 3-10 False Entries
- Tamper Beep Available or Tamper Beep Disabled
- Alarming and Tamper Warning Outputs
- Non-volatile Memory in Power Failure
- Stainless Steel Faceplate
- Flush Mount or Surface Mount

SPECIFICATIONS:

Operating Voltage : 12VDC

Current Drain : Quiescent State= 25mA (iDK-9732)
25mA (iDK-9762)
25mA (iDK-9782)
Active State= 81mA (iDK-9732)
100mA (iDK-9762)
117mA (iDK-9782)

Relay Output Contacts: N.O. and N.C. Dry Contacts,
Max Rating of Contact Current
2A/24V DC
(5A/24V DC Option for Output 1)

Capacity of Recording : 500 ID Cards or 500 Codes, or
ID Cards and Codes Max total 500 sets

Card Reading Distance : Max Distance 6 CM

Type of ID Card : EM Card 125 KHz

Dimension : 117(H) x73(W) x40(D) mm

Weight : iDK-9732 160g
iDK-9762 165g
iDK-9782 170g

Manufacturer & Exporter



ADVANCED ELECTRONICS INDUSTRY LIMITED
HONG KONG

TEL : (852) 24299719
FAX : (852) 24892411
E-MAIL : aei@aei-secucom.com
WEBSITE : <http://www.aei-secucom.com>